




Replacing the Wi-Fi chipset why! W253EU (German)

Replace wi-fi original Intel chipset.

Written By: Felice Suglia




Step 1 — battery pack

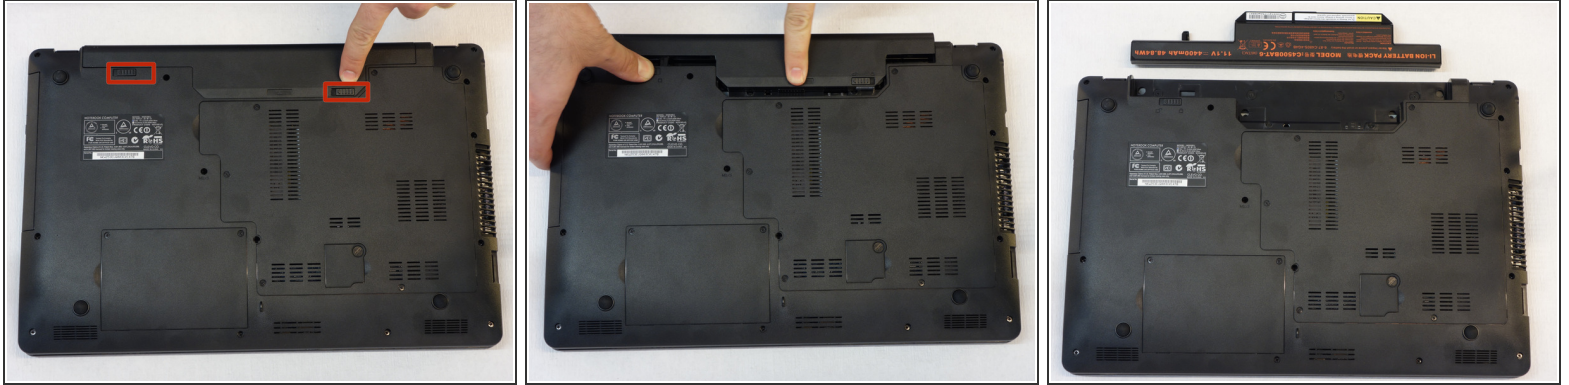


- off computer.
- Before each handle, it is important to start the expansion of the accumulator.
- bring in unlocked position slider Removing the battery.

Step 2 — Access to RAM memory and CPU

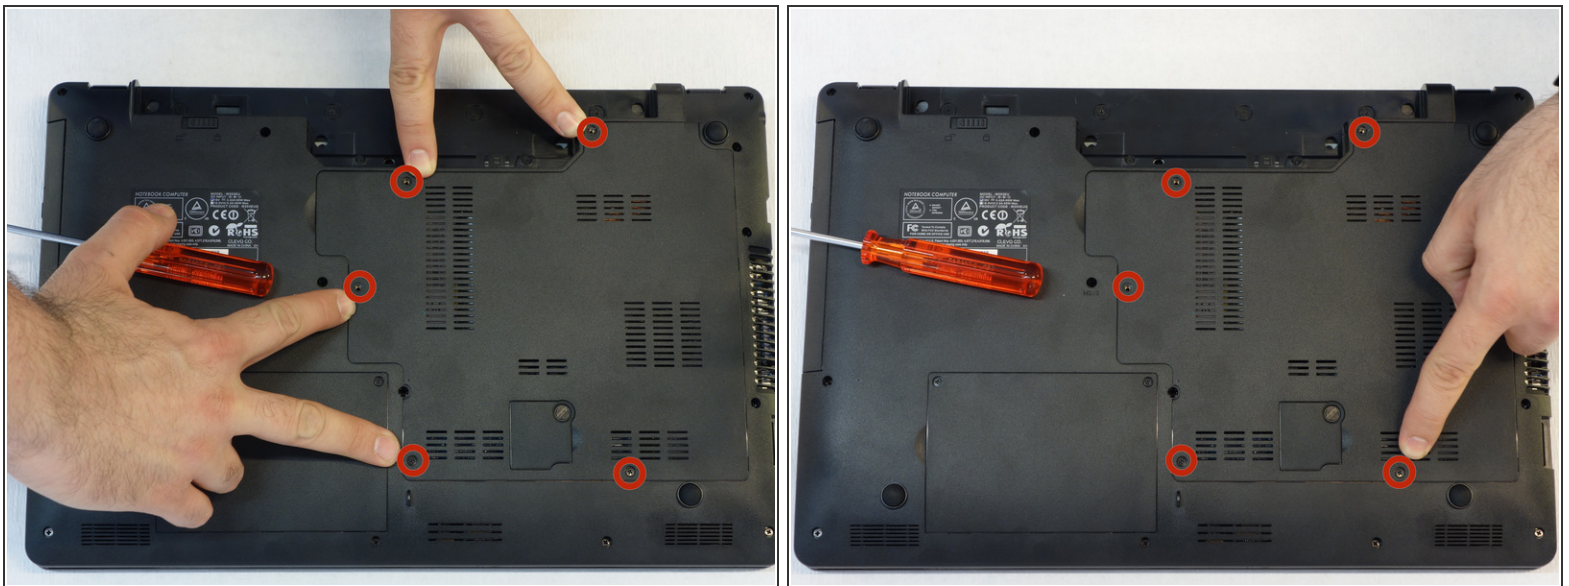


- With the screwdriver Philips # 1, screw the 5 screws securing the cover off.

Step 3

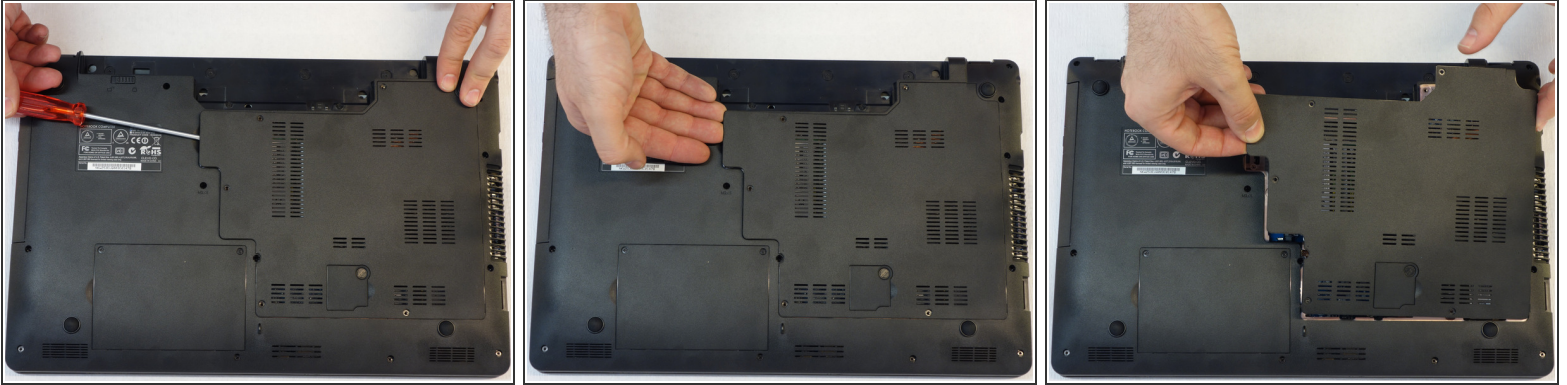


- Screwdriver a few millimeters under the cover slide so that it can then be handled with the fingers.
- Cover now lifting carefully.
- Attention! Ventilatorlabel separate so that the cover can be removed completely (see next step).

Step 4

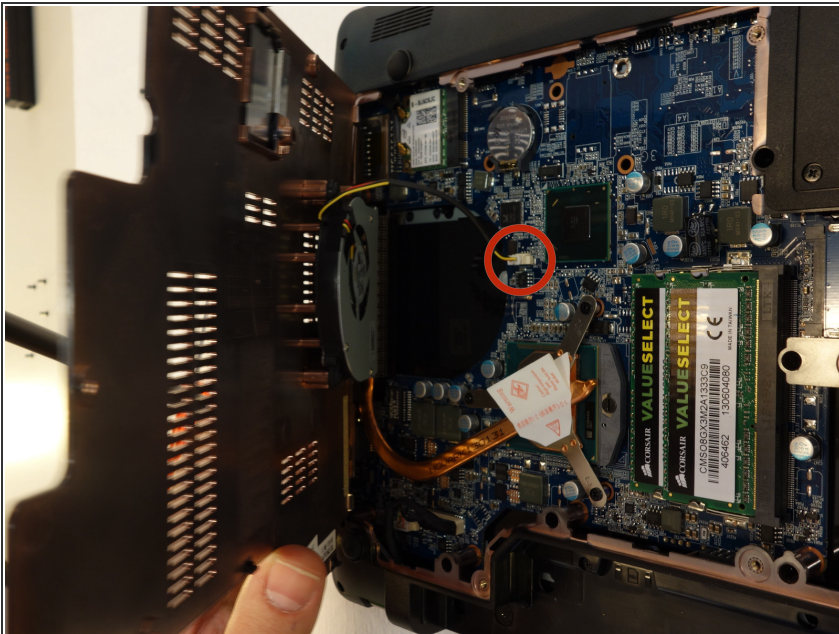

- Since the ventilátor is fixed under the cover, be power cord must first be separated so that the cover can then be completely removed.

Step 5 — Wi-Fi Chipset

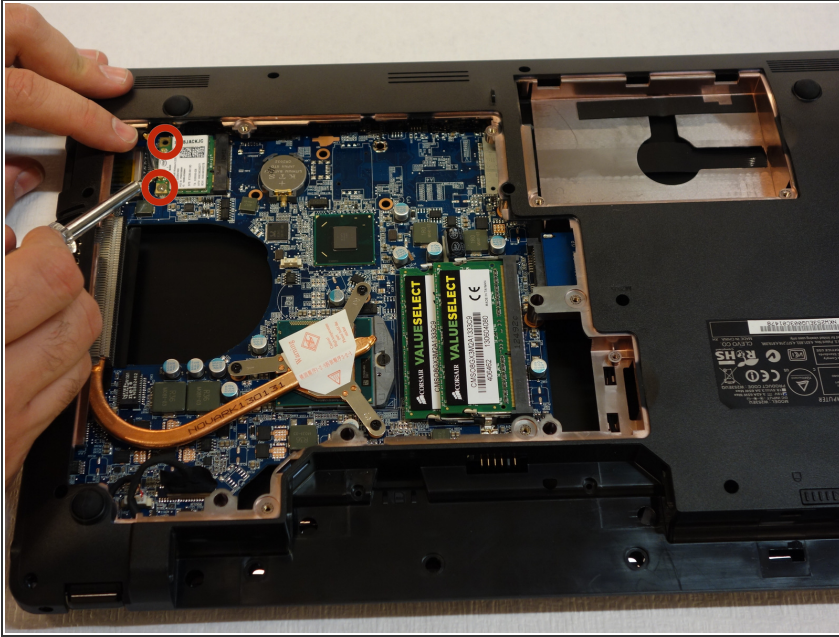

- With the screwdriver Phillips # 1, remove the two screws securing the Wi-Fi chipsets.

Für den Zusammenbau die Instruktionen in umgekehrter Reihenfolge ausführen.

This document was last generated on 2017-06-18 01:53:27 PM.